

# LumenAir Remote HMI


Remote operator panel controls up to ten LumenAir units

Model: HMI-2

## Features

- Remotely control up to ten channels of air
- RS485 data port plugs directly into any of our modular LumenAir systems using the included 25ft data cable
- NO complex setup, just plug the remote unit into your LumenAir unit(s) and you're ready to go
- Full color 4.3 inch touch panel 480 x 272
- Connection via Modbus RTU RS485 data port
- Dimensions: 10"W 5.75"H 2.5"D
- Weight: 2 lb
- Power input: 24 volts DC 200mA  
Using the included power adaptor

Model: HMI-2     \$595 USD

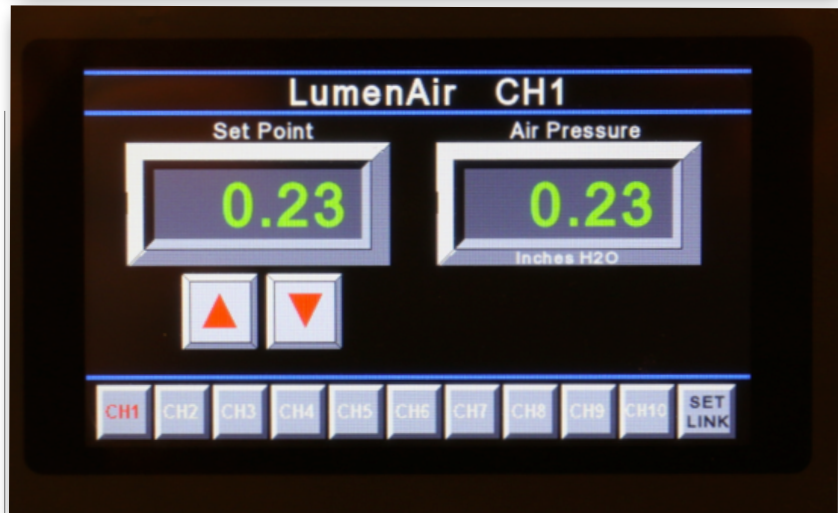

## New for 2016

The HMI-2 remote operator panel is typically mounted near the extrusion puller and connects directly to any of our modular LumenAir units using the included data cable. This gives you remote adjustment of up to ten channels of low-pressure air to your extrusion die. Our modular LumenAir systems have two data ports. The remote operator panel is plugged into either data port. You can use the second data port to connect additional LumenAir modules, and connect up to ten LumenAir modules this way by using the optional 12-inch data jumper cables.